

Problem 7.4

Situation: A compressor is described in the problem statement.

Find: Power required to operate compressor.

APPROACH

Apply the energy principle.

ANALYSIS

Energy principle

$$\dot{Q} - \dot{W}_s = \sum_{CS} \dot{m}_{out} \left(\frac{V^2}{2} + gz + h \right)_{out} - \sum_{CS} \dot{m}_{in} \left(\frac{V^2}{2} + gz + h \right)_{in}$$


$$\dot{W} = \dot{Q} + \dot{m}(V_1^2/2 - V_2^2/2 + h_1 - h_2)$$

The inlet kinetic energy is negligible so

$$\begin{aligned}\dot{W} &= \dot{m}(-V_2^2/2 + h_1 - h_2) \\ &= 1.5(-200^2/2 + 300 \times 10^3 - 500 \times 10^3)\end{aligned}$$

$$\dot{W} = -330 \text{ kW}$$

Problem 7.7

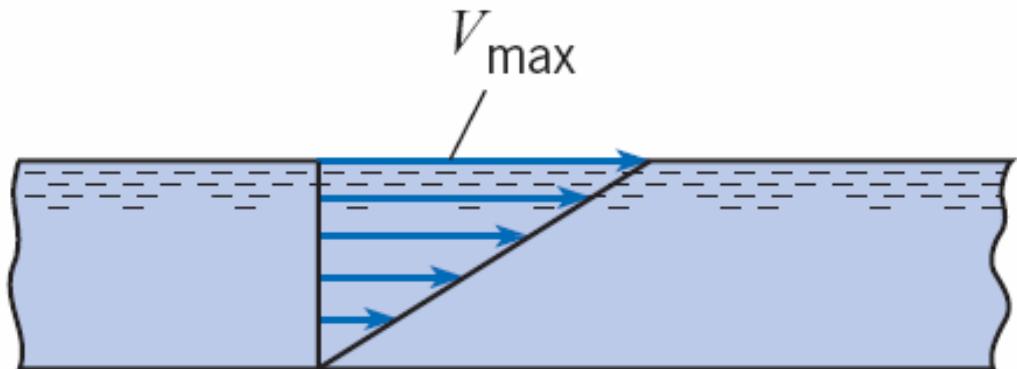

Situation: A hypothetical velocity distribution in a rectangular channel is described in the problem statement.

Find: Kinetic energy correction factor: α

ANALYSIS

$$\alpha = \frac{1}{A} \int_A \left(\frac{V}{\bar{V}} \right)^3 dA$$

$$\bar{V} = V_{\max}/2 \text{ and } V = V_{\max}y/d$$


Kinetic energy correction factor

$$\alpha = (1/d) \int_0^d (V_{\max}y/((V_{\max}/2)d))^3 dy$$

$$= (1/d) \int_0^d (2y/d)^3 dy$$

$$\boxed{\alpha = 2}$$

Problem 7.15

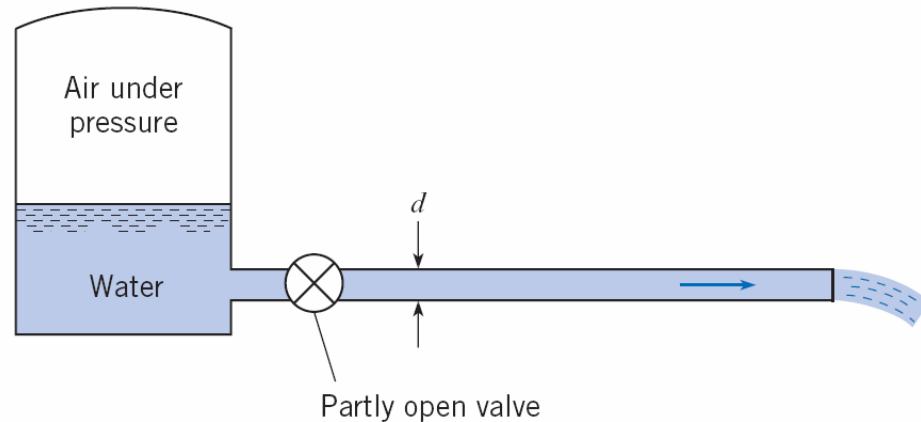

Apply the energy equation to a control volume surrounding the water. Analyze each term and then solve the resulting equation to find the minor loss coefficient.

ANALYSIS


Energy equation

$$\frac{p_1}{\gamma} + \alpha_1 \frac{V_1^2}{2g} + z_1 + h_p = \frac{p_2}{\gamma} + \alpha_2 \frac{V_2^2}{2g} + z_2 + h_t + h_L \quad (1)$$

Analyze each term:

- At the inlet. $p_1 = 100 \text{ kPa}$, $V_1 \approx 0$, $z_1 = 12 \text{ m}$
- At the exit, $p_2 = 0 \text{ kPa}$, $V_2 = 10 \text{ m/s}$, $\alpha_2 = 1.0$.
- Pumps and turbines. $h_p = h_t = 0$

Problem 7.15

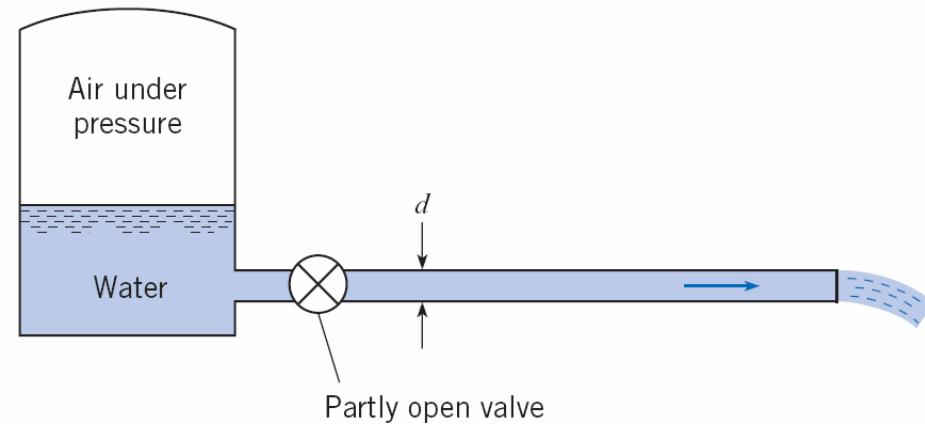

- Head loss. $h_L = K_L \frac{V^2}{2g}$

Eq. (1) simplifies to

$$\begin{aligned}\frac{p_1}{\gamma} + z_1 &= \alpha_2 \frac{V_2^2}{2g} + K_L \frac{V_2^2}{2g} \\ \frac{(100,000 \text{ Pa})}{(9800 \text{ N/m}^3)} + 12 \text{ m} &= \frac{(10 \text{ m/s})^2}{2(9.81 \text{ m/s}^2)} + K_L \frac{(10 \text{ m/s})^2}{2(9.81 \text{ m/s}^2)} \\ 22.2 \text{ m} &= (5.097 \text{ m}) + K_L (5.097 \text{ m})\end{aligned}$$

Thus


$$K_L = 3.35$$

Problem 7.21

Situation: An engineer is estimating the power that can be produced by a small stream.

Stream discharge: $Q = 1.4 \text{ cfs}$. Stream temperature: $T = 40^\circ\text{F}$.

Stream elevation: $H = 34 \text{ ft}$ above the owner's residence.

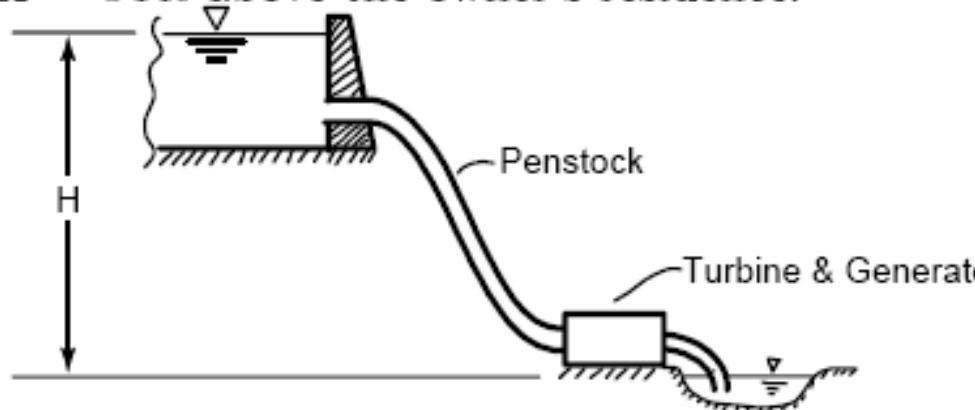

Find: Estimate the maximum power in kilowatts that can be generated.

- The head loss is 0.0 ft, the turbine is 100% efficient and the generator is 100% efficient.
- The head loss is 5.5 ft, the turbine is 70% efficient and the generator is 90% efficient.

Problem 7.21

APPROACH

To find the head of the turbine (h_t), apply the energy equation from the upper water surface (section 1) to the lower water surface (section 2). To calculate power, use $P = \eta(\dot{m}gh_t)$, where η accounts for the combined efficiency of the turbine and generator.

ANALYSIS

Energy equation

$$\frac{p_1}{\gamma} + \alpha_1 \frac{V_1^2}{2g} + z_1 = \frac{p_2}{\gamma} + \alpha_2 \frac{V_2^2}{2g} + z_2 + h_t + h_L \quad (1)$$

Term by term analysis

$$p_1 = 0; \quad V_1 \approx 0$$

$$p_2 = 0; \quad V_2 \approx 0$$

$$z_1 - z_2 = H$$

Eq. (1) becomes

$$H = h_t + h_L$$

$$h_t = H - h_L$$

Flow rate

$$\begin{aligned} \dot{m}g &= \gamma Q \\ &= (62.4 \text{ lbf/ft}^3) (1.4 \text{ ft}^3/\text{s}) \\ &= 87.4 \text{ lbf/s} \end{aligned}$$

Problem 7.21

Power (case a)

$$\begin{aligned}P &= \dot{m}gh_t \\&= \dot{m}gH \\&= (87.4 \text{ lbf/s}) (34 \text{ ft}) (1.356 \text{ J/ft} \cdot \text{lbf}) \\&= 4.02 \text{ kW}\end{aligned}$$


Power (case b).

$$\begin{aligned}P &= \eta\dot{m}g(H - h_L) \\&= (0.7)(0.9)(87.4 \text{ lbf/s}) (34 \text{ ft} - 5.5 \text{ ft}) (1.356 \text{ J/ft} \cdot \text{lbf}) \\&= 2.128 \text{ kW}\end{aligned}$$

Power (case a) = 4.02 kW

Power (case b) = 2.13 kW

Problem 7.27

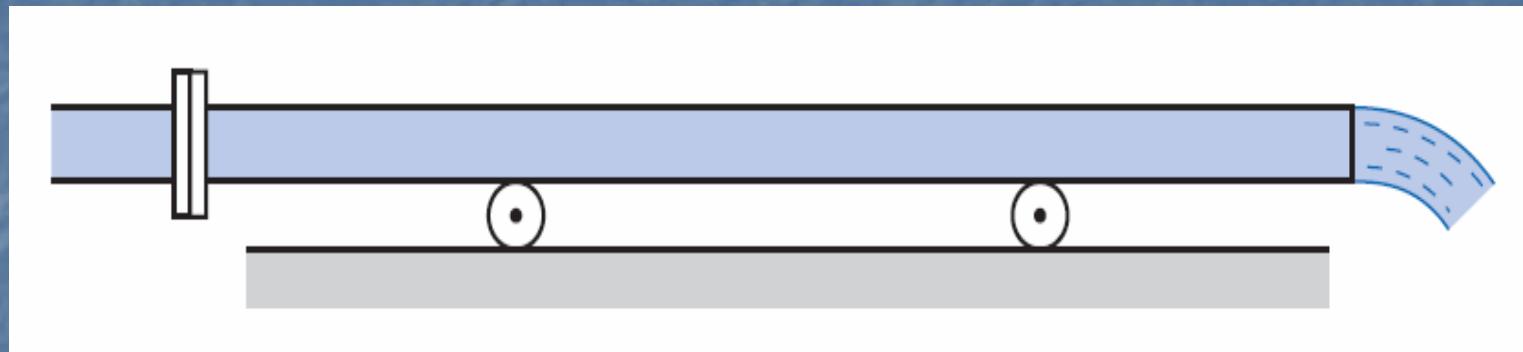

$$(h_{\text{Loss}})_{\text{pipe}} = 3 \text{ ft}, \quad \gamma = 62.4 \text{ lbf/ft}^3, \quad A_{\text{pipe}} = 9 \text{ in}^2, \quad V_{\text{pipe}} = 15 \text{ ft/s}, \quad \alpha = 1$$

Situation: Flow though a pipe is described in the problem statement.

Find: Force on pipe joint.

Problem 7.27

APPROACH

Apply the momentum principle, then the energy equation.

ANALYSIS



Momentum Equation

$$\begin{aligned}\sum F_x &= \dot{m}V_{o,x} - \dot{m}V_{i,x} \\ F_j + p_1 A_1 &= -\rho V_x^2 A + \rho V_x^2 A \\ F_j &= -p_1 A_1\end{aligned}$$

Energy equation

$$\frac{p_1}{\gamma} + \frac{V_1^2}{2g} + z_1 = \frac{p_2}{\gamma} + \frac{V_2^2}{2g} + z_2 + h_L$$


$$p_1 - p_2 = \gamma h_L$$

$$p_1 = \gamma(3) = 187.2 \text{ psfg}$$

$$F_j = -187.2 \times \left(\frac{9}{144}\right)$$

$$F_j = -11.7 \text{ lbf}$$

Problem 7.28

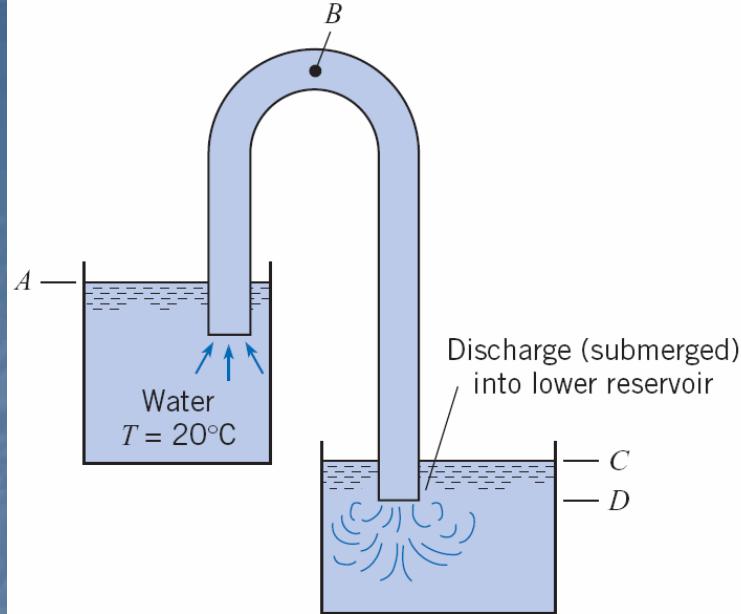

$$Z_A = 30\text{m}, \quad Z_B = 32, \quad Z_C = 27\text{m}, \quad Z_D = 26\text{m}, \quad \alpha_1 = \alpha_2 = 1, \quad d_{\text{pipe}} = 25\text{cm}$$

$$(h_{\text{Loss}})_{A-B} = 0.75 \frac{V_p^2}{2g}, \quad (h_{\text{Loss}})_{B-D} = 0.25 \frac{V_p^2}{2g}$$

Situation: A siphon is described in the problem statement.

Find:

- Discharge.
- Pressure at point B.

Problem 7.28

APPROACH


Apply the energy equation from A to C, then from A to B.

ANALYSIS

Head loss

$$h_{t_{\text{pipe}}} = \frac{V_p^2}{2g}$$

$$h_{\text{Total}} = (h_{\text{Loss}})_{A-B} = 0.75 \frac{V_p^2}{2g} + (h_{\text{Loss}})_{B-D} = 0.25 \frac{V_p^2}{2g}$$

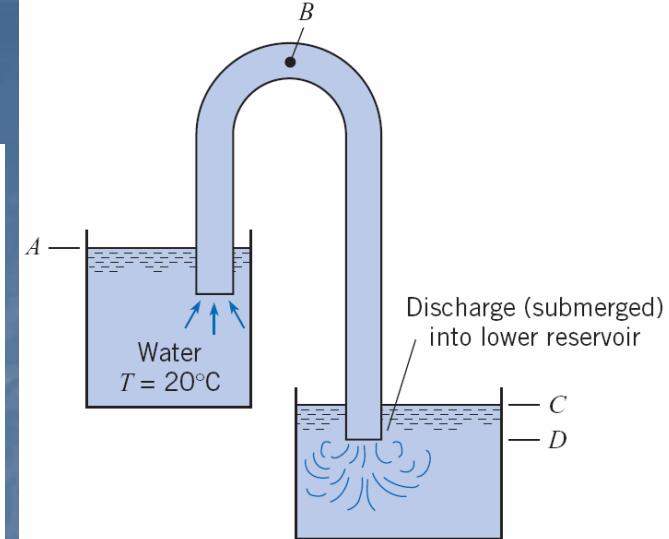

Apply the energy equation from A to C, then from A to B.

ANALYSIS

Head loss

$$h_{\ell_{\text{pipe}}} = \frac{V_p^2}{2g}$$

$$h_{\text{total}} = h_{\ell_{\text{pipe}}} + h_{\ell_{\text{outlet}}} = 2 \frac{V_p^2}{2g}$$

Energy equation (from A to C)

$$0 + 0 + 30 = 0 + 0 + 27 + 2 \frac{V_p^2}{2g}$$
$$V_p = 5.42 \text{ m/s}$$

Flow rate equation

$$Q = V_p A_p$$
$$= 5.42 \times (\pi/4) \times 0.25^2$$
$$Q = 0.266 \text{ m}^3/\text{s}$$

Energy equation (from A to B)


$$30 = \frac{p_B}{\gamma} + \frac{V_p^2}{2g} + 32 + 0.75 \frac{V_p^2}{2g}$$

$$\frac{p_B}{\gamma} = -2 - 1.75 \times 1.497 \text{ m}$$

$$p_B = -45.3 \text{ kPa, gage}$$

Problem 7.31

$$\dot{Q} = 10 \text{ ft}^3/\text{s}$$

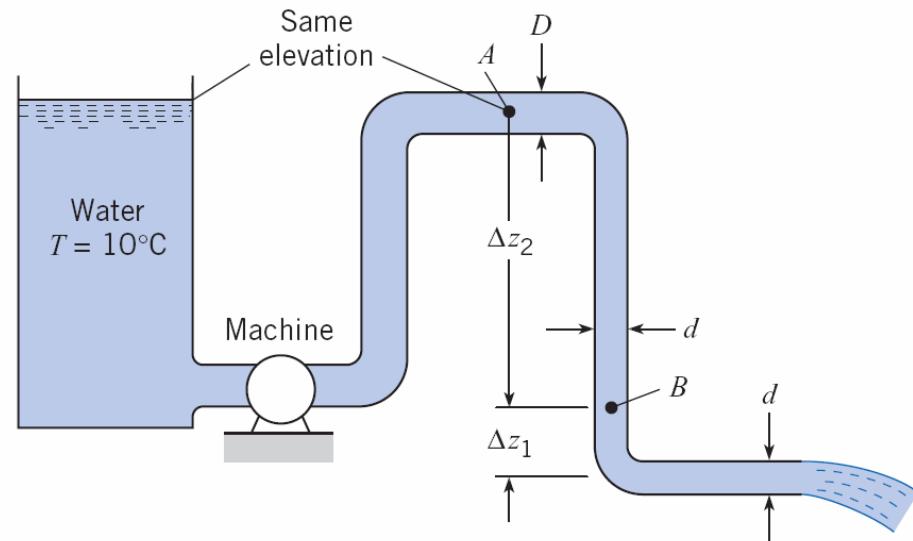

Situation: A system with a machine is described in the problem statement.

Find: Pressures at points A and B.

Assumptions: Machine is a pump

$$\left(h_P + \frac{p_1}{\rho g} + z_1 + \alpha_1 \frac{\bar{V}_1^2}{2g} \right)_{\text{Mech. part}} = \left(h_T + \frac{p_2}{\rho g} + z_2 + \alpha_2 \frac{\bar{V}_2^2}{2g} \right)_{\text{Mech. part}} + h_{\text{Loss}}$$

Problem 7.31

$$\left(h_P + \frac{p_1}{\rho g} + z_1 + \alpha_1 \frac{\bar{V}_1^2}{2g} \right)_{Mech.\,part} = \left(h_T + \frac{p_2}{\rho g} + z_2 + \alpha_2 \frac{\bar{V}_2^2}{2g} \right)_{Mech.\,part} + h_{Loss}$$

Energy equation

$$z_1 + h_p = \frac{V_2^2}{2g} + z_2$$

Assuming the machine is a pump. If the machine is a turbine, then h_p will be negative. The velocity at the exit is

$$V_2 = \frac{Q}{A_2} = \frac{10}{\frac{\pi}{4} 0.5^2} = 50.93 \text{ ft/s}$$

Solving for h_p and taking the pipe exit as zero elevation we have

$$h_p = \frac{50.93^2}{2 \times 32.2} - (6 + 12) = 22.3 \text{ ft}$$

Therefore the machine is a pump.

Applying the energy equation between point B and the exit gives

$$\frac{p_B}{\gamma} + z_B = z_2$$

Problem

7.31

Solving for p_B we have

$$\begin{aligned} p_B &= \gamma(z_2 - z_B) \\ p_B &= -6 \times 62.4 = -374 \text{ psfg} \\ p_B &= -2.6 \text{ psig} \end{aligned}$$

Velocity at A

$$V_A = \left(\frac{6}{12} \right)^2 \times 50.93 = 12.73 \text{ ft/s}$$


Applying the energy equation between point A and the exit gives

$$\frac{p_A}{\gamma} + z_A + \frac{V_A^2}{2g} = \frac{V_2^2}{2g}$$

so

$$\begin{aligned} p_A &= \gamma \left(\frac{V_2^2}{2g} - z_A - \frac{V_A^2}{2g} \right) \\ &= 62.4 \times \left(\frac{50.93^2 - 12.73^2}{2 \times 32.2} - 18 \right) \\ &= 1233 \text{ psfg} \\ p_A &= 8.56 \text{ psig} \end{aligned}$$

Problem 7.37

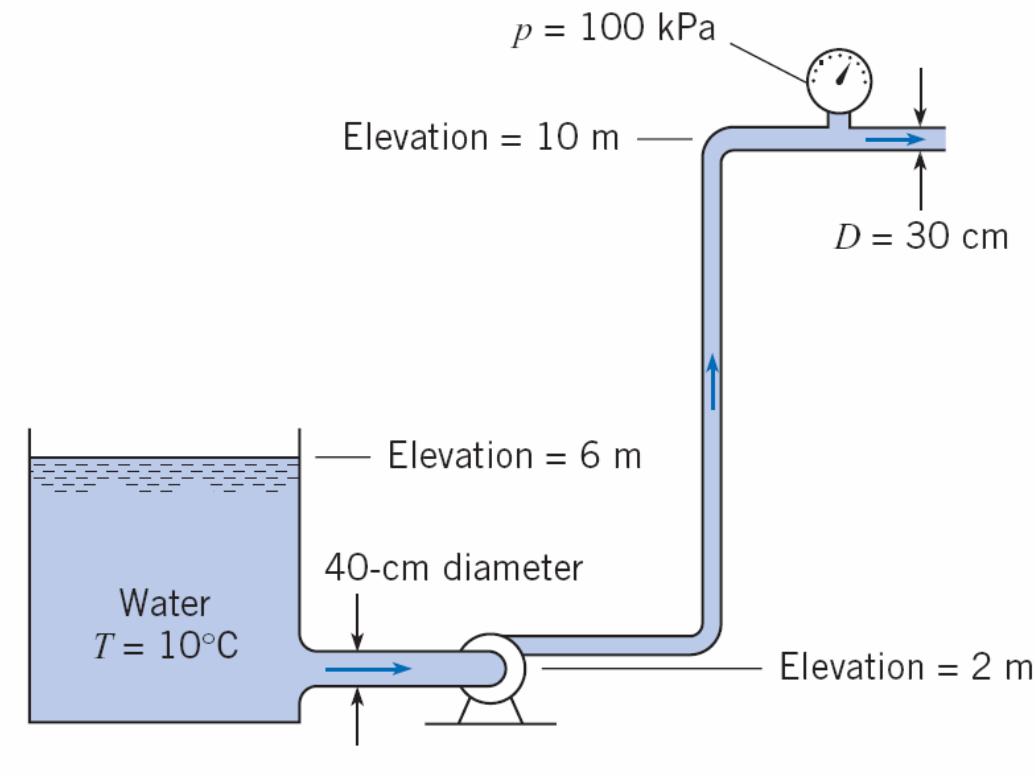

Situation: A system with pump is described in the problem statement.

Find: Power pump must supply.

APPROACH

Apply the flow rate equation, then the energy equation from reservoir surface to the 10 m elevation. Then apply the power equation.

Problem 7.37

$$\left(h_P + \frac{p_1}{\rho g} + z_1 + \alpha_1 \frac{\bar{V}_1^2}{2g} \right)_{Mech.\,part} = \left(h_T + \frac{p_2}{\rho g} + z_2 + \alpha_2 \frac{\bar{V}_2^2}{2g} \right)_{Mech.\,part} + h_{Loss}$$

ANALYSIS

Flow rate equation

$$\begin{aligned} V &= Q/A \\ &= 0.25/((\pi/4) \times 0.3^2) \\ &= 3.54 \text{ m/s} \\ V^2/2g &= 0.639 \text{ m} \end{aligned}$$

Energy equation

$$\begin{aligned} 0 + 0 + 6 + h_p &= 100,000/9810 + V^2/2g + 10 + 2.0V^2/2g \\ h_p &= 10.19 + 10 - 6 + 3.0 \times 0.639 \\ h_p &= 16.1 \text{ m} \end{aligned}$$


Power equation

$$\begin{aligned} P &= Q\gamma h_p \\ &= 0.25 \times 9.180 \times 16.1 \\ P &= 39.5 \text{ kW} \end{aligned}$$

Problem 7.39

$$\dot{Q} = 400 \text{ ft}^3/\text{s}$$

$$(h_{\text{Loss}})_{\text{pipe}} = \left(\frac{1.5V^2}{2g} \right)_{7\text{ft}}, \quad \gamma = 62.4 \text{ lbf/ft}^3, \quad \alpha = 1$$

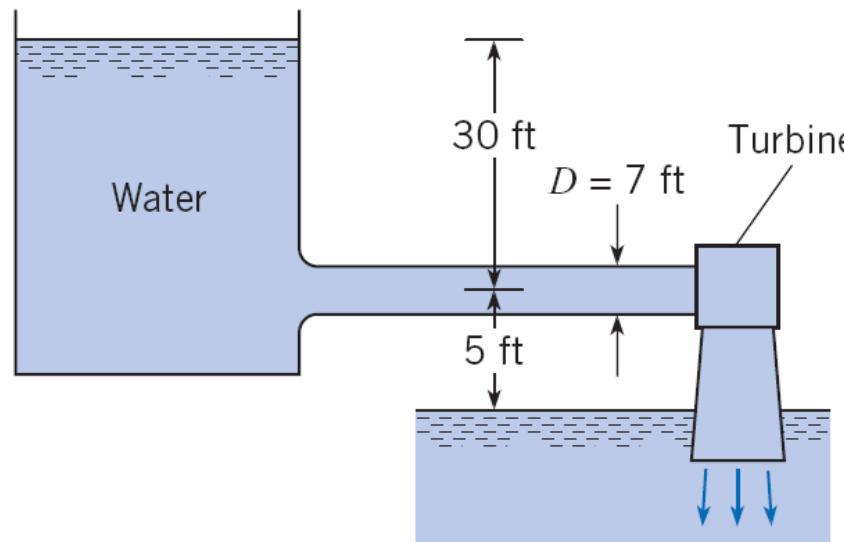

Situation: A system with a turbine is described in the problem statement.

Find: Power output from turbine.

$$\left(h_P + \frac{p_1}{\rho g} + z_1 + \alpha_1 \frac{\bar{V}_1^2}{2g} \right)_{\text{Mech. part}} = \left(h_T + \frac{p_2}{\rho g} + z_2 + \alpha_2 \frac{\bar{V}_2^2}{2g} \right)_{\text{Mech. part}} + h_{\text{Loss}}$$

Problem 7.39

Apply the energy equation from the upstream water surface to the downstream water surface. Then apply the power equation.

ANALYSIS

Energy equation


$$\begin{aligned}\frac{p_1}{\gamma} + \frac{V_1^2}{2g} + z_1 &= \frac{p_2}{\gamma} + \frac{V_2^2}{2g} + z_2 + h_L + h_T \\ 0 + 0 + 35 &= 0 + 0 + 0 + 1.5 \frac{V^2}{2g} + h_T \\ V &= \frac{Q}{A} = \frac{400}{((\pi/4) \times 7^2)} = 10.39 \text{ ft/s} \\ \frac{V^2}{2g} &= 1.68 \text{ ft} \\ h_t &= 35 - 2.52 = 32.48 \text{ ft}\end{aligned}$$

Problem 7.39

Power equation

$$\begin{aligned} P(\text{hp}) &= Q\gamma h_t \times \frac{0.9}{550} \\ &= \frac{(400)(62.4)(32.48 \times 0.9)}{550} \\ &\boxed{P = 1326 \text{ hp}} \end{aligned}$$

Problem 7.47

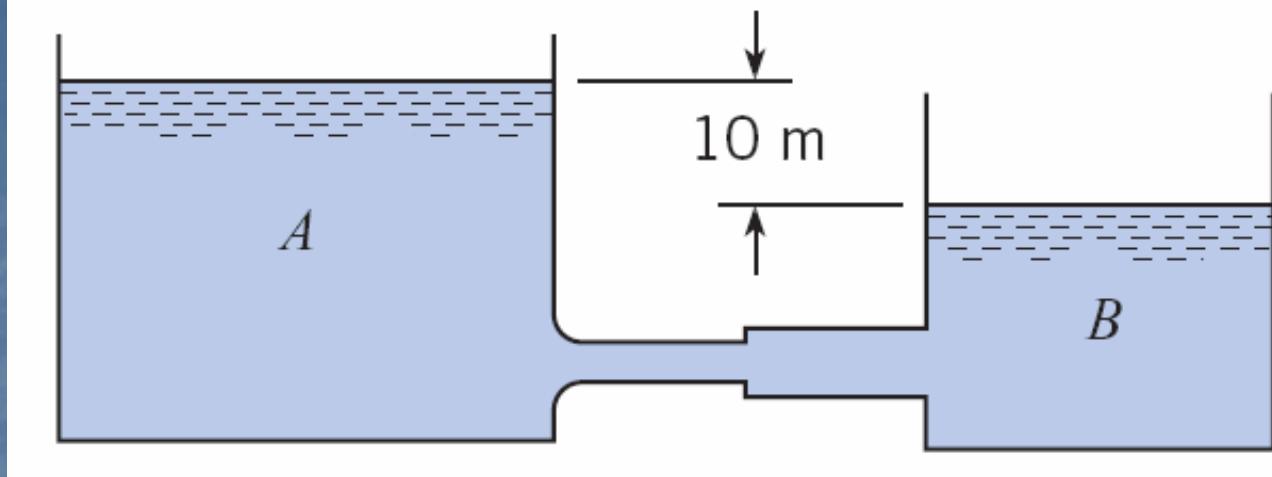

Situation: A system with two tanks connected by a pipe is described in the problem statement.

Find: Discharge between two tanks: Q

Problem 7.47

Apply the energy equation from water surface in A to water surface in B.

ANALYSIS

Energy equation

$$\begin{aligned} p_A/\gamma + V_A^2/2g + z_A &= p_B/\gamma + V_B^2/2g + z_B + \sum h_L \\ p_A &= p_B = p_{\text{atm}} \text{ and } V_A = V_B = 0 \end{aligned}$$

Let the pipe from A be called pipe 1. Let the pipe from B be called pipe 2
Then

$$\sum h_L = (V_1 - V_2)^2/2g + V_2^2/2g$$

Continuity principle

$$\begin{aligned} V_1 A_1 &= V_2 A_2 \\ V_1 &= V_2 (A_2/A_1) \end{aligned}$$

However $A_2 = 2A_1$ so $V_1 = 2V_2$. Then the energy equation gives


$$\begin{aligned} z_A - z_B &= (2V_2 - V_2)^2/2g + V_2^2/2g \\ &= 2V_2^2/2g \\ V_2 &= \sqrt{g(z_A - z_B)} \\ &= \sqrt{10g} \text{ m/s} \end{aligned}$$

Problem 7.47

Flow rate equation

$$\begin{aligned} Q &= V_2 A_2 \\ &= (\sqrt{10g} \text{ m/s}) (20 \text{ cm}^2) (10^{-4} \text{ m}^2/\text{cm}^2) \\ &= 0.0198 \text{ m}^3/\text{s} \end{aligned}$$

Problem 7.51

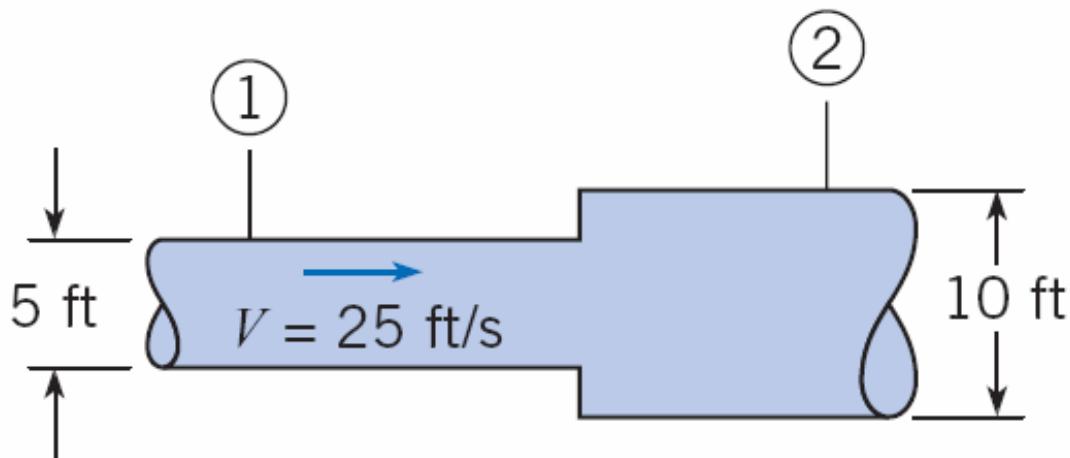

Situation: Flow through a pipe is described in the problem statement.

Find:

- (a) Horsepower lost.
- (b) Pressure at section 2.
- (c) Force needed to hold expansion.

Find the head loss by applying the sudden expansion head loss equation, first solving for V_2 by applying the continuity principle. Then apply the power equation, the energy equation, and finally the momentum principle.

Problem 7.51

ANALYSIS

Continuity equation

$$\begin{aligned}V_2 &= V_1(A_1/A_2) \\&= 25(1/4) \\&= 6.25 \text{ ft/s}\end{aligned}$$

Sudden expansion head loss equation

$$\begin{aligned}h_L &= (V_1 - V_2)^2/(2g) \\h_L &= (25 - 6.25)^2/64.4 \\&= 5.46 \text{ ft}\end{aligned}$$

a) Power equation

$$\begin{aligned}P(\text{hp}) &= Q\gamma h/550 \\Q &= VA = 25(\pi/4)(5^2) = 490.9 \text{ ft}^3/\text{s} \\P &= (490.9)(62.4)(5.46)/550 \\&= 304 \text{ hp}\end{aligned}$$

b) Energy equation

$$\begin{aligned}p_1/\gamma + V_1^2/2g + z_1 &= p_2/\gamma + V_2^2/2g + z_2 + h_L \\(5 \times 144)/62.4 + 25^2/64.4 &= p_2/\gamma + 6.25^2/64.4 + 5.46 \\p_2/\gamma &= 15.18 \text{ ft} \\p_2 &= 15.18 \times 62.4 \\&= 947 \text{ psfg} \\&= 6.58 \text{ psig}\end{aligned}$$

Problem 7.51

c) Momentum equation

$$\begin{aligned}\sum F_x &= \dot{m}_o V_{x,o} - \dot{m}_i V_{x,i} \\ \dot{m} &= 1.94 \times (\pi/4) \times 5^2 \times 25 \\ &= 952.3 \text{ kg/s}\end{aligned}$$

$$\begin{aligned}p_1 A_1 - p_2 A_2 + F_x &= \dot{m}(V_2 - V_1) \\ (5)(14)\pi/4(5^2) - (6.57)(144)(\pi/4)(10^2) + F_x &= 952.3 \times (6.25 - 25)\end{aligned}$$

$$F_x = 42,426 \text{ lbf}$$

